




**The #1 Waste Oil Furnace
In Customer Satisfaction™**

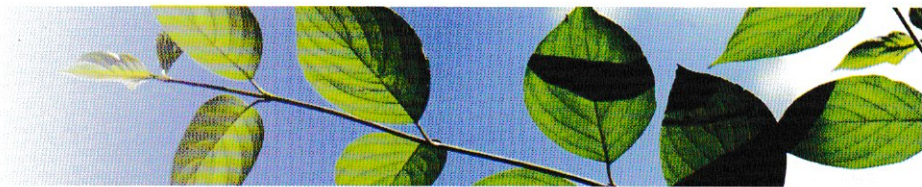


The Market Leaders

Low Profile Used-Oil Furnaces

Models CB-1500 & CB-2500

The Clean Burn Models CB-1500 and CB-2500 just may be the world's most popular multi-oil furnaces because of the outstanding value they deliver. They are engineered for easier installation, a longer cleaning interval and high efficiency performance over a very long service life.

These unique Clean Burn units provide more installation and functional options than any other multi-oil furnace. The low profile is ideal for limited ceiling heights, and the range of installation options is unsurpassed. The hot air discharge louvers can be installed to put the heat precisely where you want it. The chimney outlets fit on either side so that the finished installation works perfectly for your facility. Put it all together and you have what amounts to a custom installation designed specifically for your facility.

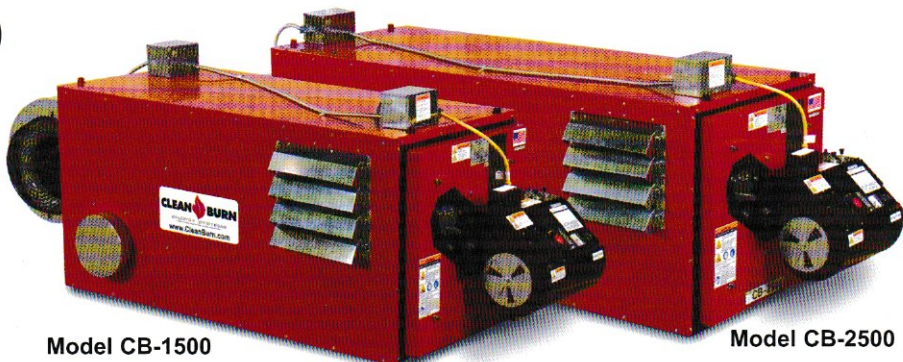

Model CB-1500


Model CB-2500

Clean Burn multi-oil furnaces are engineered from the ground up to burn a wide range of oils for free heat, and comply with all EPA regulations. Your Clean Burn distributor is a fully trained and highly experienced expert in multi-oil combustion technology. With Clean Burn you get a superior product, unrivaled support and the greatest return on your investment for years to come.



Clean Burn is a strong advocate of environmental protection and energy conservation. Our multi-oil heating systems, storage tanks and recycling centers eliminate extra handling and transportation of used oils and, consequently, help avoid the possibility of used oils entering our water supplies.


The first choice for efficiency, reliability and return on investment

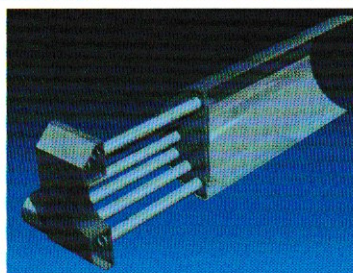

Patented Clean Burn Heat Exchanger gives you more heat for less oil, and longer service life.




Swaging is a metal joining technique more durable than welding because it allows expansion and contraction without cracking.

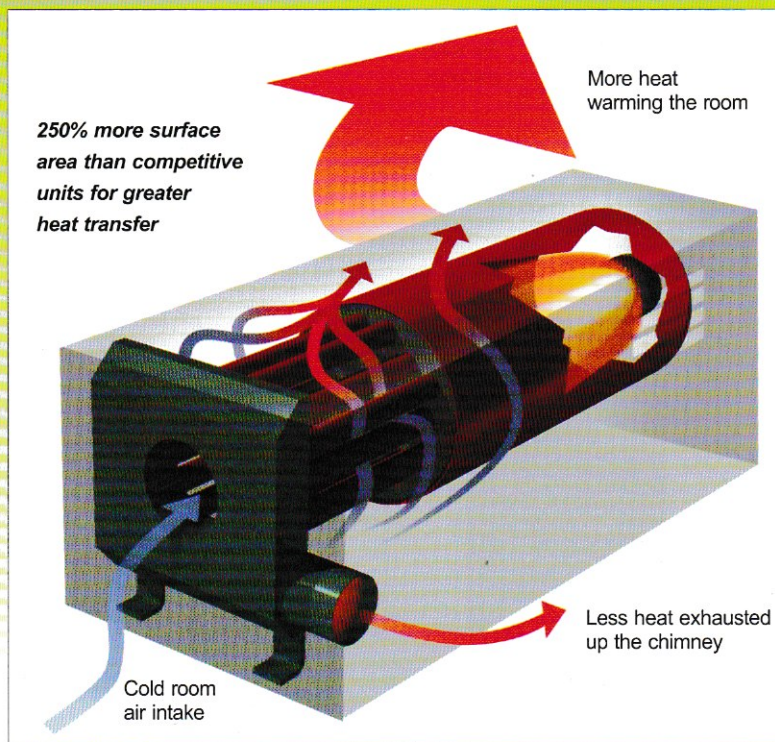


The world's most reliable, most technically advanced multi-oil furnaces, only from Clean Burn.

Powerful & Dependable Metering Pump

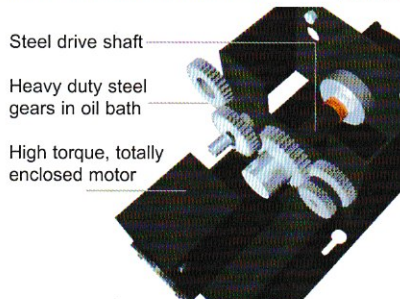

Nothing else compares for reliability and installation options. The superior Clean Burn pumping systems have the potential to pump oil up to 91 m distance with minimum -40°C oil temperature, and will draw oil stored in outside tanks.

Easy access for cleaning and service



Door swings open for easy cleaning.



Burner swings out for easy service.

Furnace systems include:

- In-line washable oil filter
- Tank filter
- Vacuum gauge for filter
- Barometric damper
- Wall thermostat
- Oil line fittings package
- Check valve
- Oil supply pump

Model CB-1500

The Clean Burn Model CB-1500 is rated at approximately 150,000 BTU/h. Low profile design for convenient installation. UL and CE listed for use as a unit heater or central (ducted) furnace.

***Maximum BTU/hour**
150,000 (44 kW)

***Maximum oil consumption**
4 L/h (1.1 GPH)

Fuels

Used oils Crankcase, ATF, hydraulic
Fuel oils #2, #4, and #5 fuel oil

Air flow output (CFM)

Unit heater 1700
Central furnace (ducted)
0.25 SPWC (in.) 1500
0.30 SPWC (in.) 1400

***Air compressor req'd**
2.0 CFM @ 20 PSI
(3.4 m³/h @ 1.4 bar)

Stack size
8 inch dia. (203mm dia.)

Furnace dimensions, assembled
83.25" L x 29.5" W x 29.25" H
(2115 x 750 x 743 mm)

Approx. weight (uncrated)
320 pounds (145 kg)

Electrical requirements
230 V/50 Hz; 10.9 amps
15 amps circuit breaker

Model CB-2500

The larger of the two Clean Burn low profile models, the Model CB-2500 used-oil furnace is rated at approximately 250,000 BTU/hr. Popular at facilities with multiple bays. UL and CE listed for use as a unit heater or central (ducted) furnace.

***Maximum BTU/hour**
250,000 (77 kW)

***Maximum oil consumption**
6.4 L/h (1.7 GPH)

Fuels

Used oils Crankcase, ATF, hydraulic
Fuel oils #2, #4, and #5 fuel oil

Air flow output (CFM)

Unit heater 2700
Central furnace (ducted)
0.25 SPWC (in.) 2500
0.40 SPWC (in.) 2400

***Air compressor req'd**
2.0 CFM @ 20 PSI
(3.4 m³/h @ 1.4 bar)

Stack size
8 inch dia. (203mm dia.)

Furnace dimensions, assembled
103.25" L x 29.25" W x 31.5" H
(2623 x 743 x 800mm)

Approx. weight (uncrated)
340 pounds (154 kg)

Electrical requirements
230 V/50 Hz; 11.3 amps
15 amps circuit breaker

* Values indicated above are nominal. Actual values will vary depending on fuel and installation.




CLEAN BURN

**The #1 Waste Oil Furnace
In Customer Satisfaction™**

4109 Capital Circle
Janesville, WI USA 53546

1-800-331-0183 Fax: 717-656-0952

www.CleanBurn.com



All Clean Burn products are backed by unmatched professional factory installation and service